

## Uniform Automatic, Case Erector and Bottom Case Taping System

# STA-F2000

S E R I E S

- Simple, reliable side drive belt system
- Engineered for 24 hour operation
- Simple, easy set-up
- Up to 15 cases per minute
- Self-diagnostics
- Alarm lights standard
- On demand standard
- Small footprint
- Less than 3 minute case changeover



## APPLICATION

The STA-F2000 Series case erector has a new side loading magazine. It loads the boxes from the horizontal position, and folds and tapes the bottom flaps. Once the case is shaped, it is ejected into a bottom taper. This machine also has a throughput rating that ranges 12-15 cases per minute.

## EXCLUSIVE STA TAPE HEAD

The patented STA taping head design is uniquely engineered to maintain consistent pressure to the tape to ensure the most secure, reliable seal possible. Our new line of interchangeable pressure sensitive taping heads are offered in a variety of tab lengths and tape widths to fit your application.


For the best results, rely on STA Proven Performance acrylic tapes, for use with your high-throughput automatic sealing machines. Together, you have the most reliable single source tape sealing system.



# STA-F2000

## S E R I E S

Uniform Automatic, Case Erector and Bottom Case Taping System

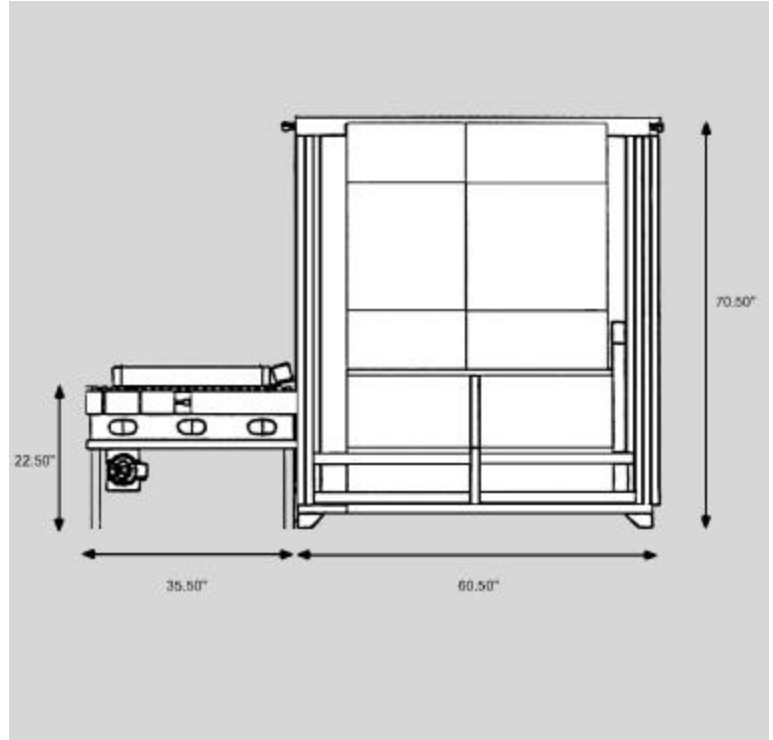

### TAPE

- SUPREME
- SILENT SUPREME™
- EASY RELEASE™
- NATURAL RUBBER
- PRINTED
- COLORS
- RETAIL ROLL
- LABEL PROTECTION
- STATIONERY
- UPVC
- MASKING
- STRAPPING
- FILAMENT
- WATER ACTIVATED REINFORCED AND GUMMED PAPER

### DISPENSERS

- HAND DISPENSERS
- NOISE REDUCING DISPENSERS
- BENCH DISPENSERS

### MACHINES

- UNIFORM SEMI-AUTOMATIC CASE SEALERS
- UNIFORM AUTOMATIC CASE SEALERS
- RANDOM SEMI-AUTOMATIC CASE SEALERS
- RANDOM AUTOMATIC CASE SEALERS
- PACKING STATIONS
- CASE ERECTORS
- INTERCHANGEABLE TAPE HEADS

### ACCESSORIES

- PACKING TABLES & STATIONS
- CASTERS
- THREE FLAPS CLOSERS
- BOX BLOCKING SYSTEM

### SPECIFICATIONS

Model Number	Description	Length Min. - Max.*	Width Min. - Max.*	Height Min. - Max.*
STAF2000	Case Erecting with bottom taping	8.66" - 23.62"	3.94" - 19.68"	5.90" - 29.52"

\*Recommended carton specifications may vary

**Power Requirements:** 480V / 60Hz / 3PH (Optional voltages available)

**Tape Width:** 2-in. standard, 3-in. available

**Throughput Rating:** 12-15 cases per minute

**Air Requirement:** PSI: 80-100 lbs., CFM: 8+, dry air, 3/8" supply line

**Machine Dimensions:** 96" x 83" x 70.5" (LxWxH)

**Floor to Conveyor:** 22.50"

**Machine Weight:** 1,080 lbs.

**Shipping Weight:** 1,540 lbs.

**Authorized STA Packaging Tapes Distributor:**

Specifications are subject to change without notice. Printed in the U.S.A. All trademarks and registered trademarks are property of Sekisui TA Industries, Inc.