

Random Semi-Automatic, Top and Bottom Case Sealer

STA-X37

S E R I E S

- Unique box holding packing station
- Simple, reliable top and bottom drive belt system
- Six tape head variations
- Especially recommended for tall narrow cartons or ink jet printing
- Self contained pneumatic adjustments require no maintenance
- Engineered for 24 hour operation
- Heavy duty frame
- Heavy duty transmission system
- Safety guards are standard
- Heavy duty casters are standard
- Motor overload protection



APPLICATION

The STA-X37 case sealer is equipped with a centering device that can hold or center a box as it is placed into the machine by the operator. After filling the box, the operator will fold the top flaps and feed the carton into the machine. The top drive assembly will automatically adjust to the random size cartons and drive the carton forward for top and bottom taping.

Along with the 90 FPM belt speed, the STA-X37 is one of the most cost effective case sealers in the industry.

EXCLUSIVE STA TAPING HEAD

The patented STA taping head design is uniquely engineered to maintain consistent pressure to the tape to ensure the most secure, reliable seal possible. Our new line of interchangeable pressure sensitive taping heads are offered in a variety of tab lengths and tape widths to fit your application.

For the best results, rely on STA Proven Performance acrylic tapes, for use with your high-throughput automatic sealing machines. Together, you have the most reliable single source tape sealing system.


STA
PACKAGING TAPES



STA-X37

SERIES

Random Semi Automatic,
Top and Bottom Case Sealer

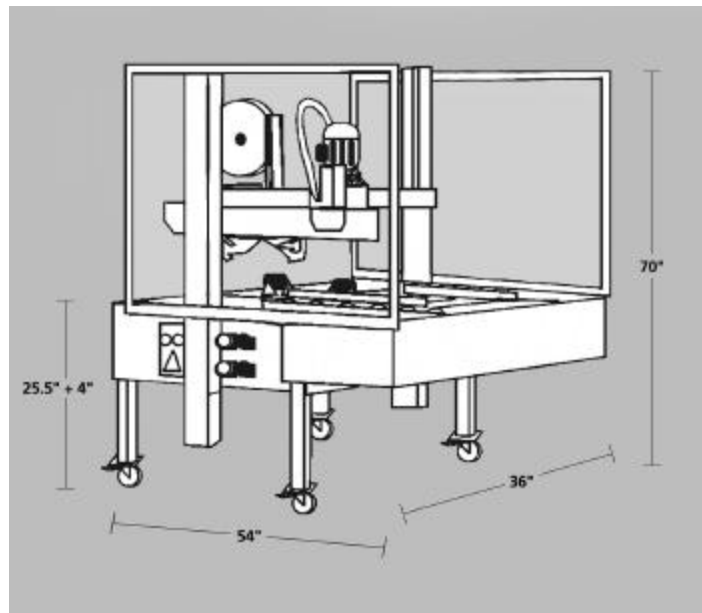

SPECIFICATIONS

Model Number	Tape Width	Tab Length	Length Min.-Max.*	Width Min.-Max.*	Height Min.-Max.*
STAX37	2"	2"	6"-Unlimited	6"-25.59"	4"-25.59"
STAX3723	2"	3"	6"-Unlimited	6"-25.59"	4.75"-25.59"
STAX3733	3"	3"	6"-Unlimited	6.5"-25.59"	4.75"-25.59"
STAX3732	3"	2"	6"-Unlimited	6.5"-25.59"	4"-25.59"

*Recommended case specifications may vary

Power Requirements:	110V / 60Hz / 1PH
Tape Width:	2-in or 3-in
Maximum Case Weight:	95 lbs.
Air Requirement:	PSI: 80-100 lbs., CFM: 3-5, dry air, 3/8" supply line
Machine Dimensions:	(LxWxH) 54" x 36" x 70"
Shipping Dimensions:	(LxWxH) 57" x 39" x 45"
Machine Weight:	275 lbs.
Shipping Weight:	352 lbs.

Authorized STA Packaging Tapes Distributor:

Specifications are subject to change without notice. Printed in the U.S.A. All trademarks and registered trademarks are property of Sekisui TA Industries, Inc.

TAPE

- SUPREME
- SILENT SUPREME™
- EASY RELEASE™
- NATURAL RUBBER
- PRINTED
- COLORS
- RETAIL ROLL
- LABEL PROTECTION
- STATIONERY
- UPVC
- MASKING
- STRAPPING
- FILAMENT
- WATER ACTIVATED REINFORCED AND GUMMED PAPER

DISPENSERS

- HAND DISPENSERS
- NOISE REDUCING DISPENSERS
- BENCH DISPENSERS

MACHINES

- UNIFORM SEMI-AUTOMATIC CASE SEALERS
- UNIFORM AUTOMATIC CASE SEALERS
- RANDOM SEMI-AUTOMATIC CASE SEALERS
- RANDOM AUTOMATIC CASE SEALERS
- PACKING STATIONS
- CASE ERECTORS
- INTERCHANGEABLE TAPE HEADS

ACCESSORIES

- PACKING TABLES & STATIONS
- CASTERS
- THREE FLAPS CLOSERS
- BOX BLOCKING SYSTEM