

Random Automatic, Flap Closing and Taping

STA-XF50

S E R I E S

- Simple, reliable side drive belt system
- Engineered for 24 hour operation
- No operator required
- Unique flap folding device
- Safety doors standard
- Light box option available
- Floating top head for over stuffed packages



APPLICATION

The STA-XF50 is the complete solution for the automatic closing and sealing of random size boxes. It automatically adjusts the side belts and the taping head to the dimension of the box, and the top minors and the major flaps are closed automatically, therefore, no operator is required. Due to its pneumatic flap closer, the STA-XF50 is also able to close and tape boxes of light corrugated board. It is particularly useful in situations where multiple production lines lead to a single closing station. The high level of automation offered by the STA-XF50 cuts down on the labor required.

EXCLUSIVE STA TAPE HEAD


The patented STA taping head is uniquely engineered to maintain consistent pressure to the tape to ensure the most secure, reliable seal possible. Our new line of interchangeable pressure sensitive taping heads are offered in a variety of tab lengths and tape widths to fit your application.

For best results, rely on STA Proven Performance acrylic tapes, for use with high-throughput automatic sealing machines. Together, you have the most reliable single source tape sealing system.



STA-XF50 S E R I E S

Random Automatic,
Flap Closing and Taping

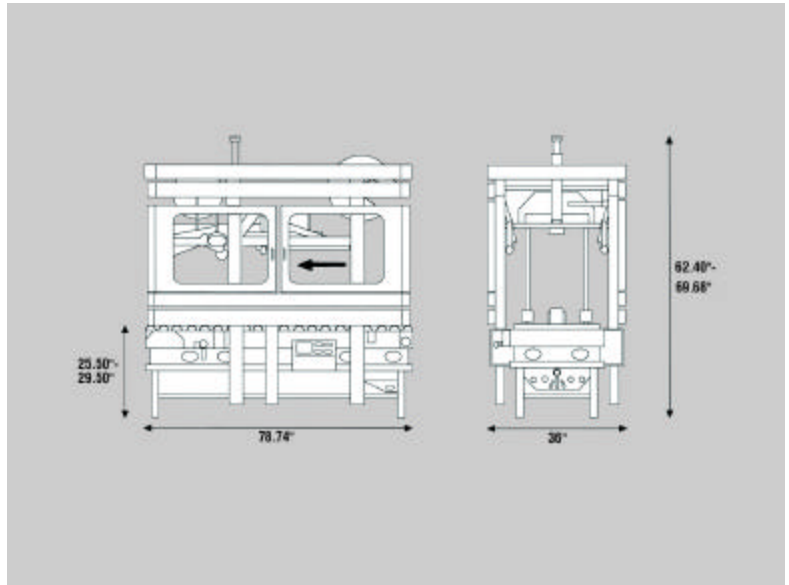

TAPE

- SUPREME
- EASY RELEASE™
- NATURAL RUBBER
- PRINTED
- COLORS
- RETAIL ROLL
- LABEL PROTECTION
- STATIONERY
- UPVC
- MASKING
- STRAPPING
- FILAMENT
- WATER ACTIVATED REINFORCED AND GUMMED PAPER

DISPENSERS

- HAND DISPENSERS
- NOISE REDUCING DISPENSERS
- BENCH DISPENSERS

MACHINES

- UNIFORM SEMI-AUTOMATIC CASE SEALERS
- UNIFORM AUTOMATIC CASE SEALERS
- RANDOM SEMI-AUTOMATIC CASE SEALERS
- RANDOM AUTOMATIC CASE SEALERS
- PACKING STATIONS
- CASE ERECTORS
- INTERCHANGEABLE TAPE HEADS

ACCESSORIES

- PACKING TABLES & STATIONS
- CASTERS
- THREE FLAPS CLOSERS
- BOX BLOCKING SYSTEM

SPECIFICATIONS

Model Number	Tape Width	Tab Length	Length Min.-Max.*	Width Min.-Max.*	Height Min.-Max.*
STAXF50	2"	2"	7.87 - 31.5	4.33 - 19.96	3.94 - 19.96
STAXF5021	2"	1"	7.87 - 31.5	4.33 - 19.96	3.94 - 19.96
STAXF5023	2"	3"	7.87 - 31.5	4.33 - 19.96	4.69 - 19.96
STAXF5033	3"	3"	7.87 - 31.5	4.94 - 19.96	4.69 - 19.96
STAXF5032	3"	2"	7.87 - 31.5	4.94 - 19.96	3.94 - 19.96
STAXF65	2"	2"	7.87 - 31.5	4.72 - 25.59	3.94 - 25.59
STAXF6521	2"	1"	7.87 - 31.5	4.72 - 25.59	3.94 - 25.59
STAXF6523	2"	3"	7.87 - 31.5	4.72 - 25.59	4.69 - 25.59
STAXF6533	3"	3"	7.87 - 31.5	4.94 - 25.59	4.69 - 25.59
STAXF6532	3"	2"	7.87 - 31.5	4.94 - 25.59	3.94 - 25.59

*Recommended carton specifications may vary

Power Requirements: 110V / 60Hz / 6.2PH

Tape Width: 2-in. standard, 3-in. available

Maximum Case Weight: 95 lbs.

Throughput Rating: 7 - 8 cases

Air Requirements: PSI: 80-100 lbs., CFM: 8+, dry air, 3/8" supply line

Machine Dimensions: (LxWxH) 78.74" x 36" x 62.40" - 69.68"

Shipping Dimensions: (LxWxH) 83.5" x 44" x 71"

Floor to Conveyor: 25.50" - 29.50"

Machine Weight: 642 lbs.

Shipping Weight: 1,032 lbs.

Authorized STA Packaging Tapes Distributor:

Specifications are subject to change without notice. Printed in the U.S.A. All trademarks and registered trademarks are property of Sekisui TA Industries, Inc.

SEKISUI TA INDUSTRIES, INC. • 100 SOUTH PUENTE STREET • BREA, CA 92821
(800) 258-8273 / (714) 255-7888 PHONE • (800) 235-8273 FAX • www.sta-tape.com