


Fully Automatic Random,
Flap Closing and Taping
with Indexer

STA-XF62 HS

S E R I E S

- Simple, reliable side drive belt system
- Engineered for 24 hour operation
- No operator required
- Unique flap folding device
- Safety doors standard
- 12 - 15 boxes per minute
- Alarm lights standard
- Heavy duty frame
- Heavy duty components

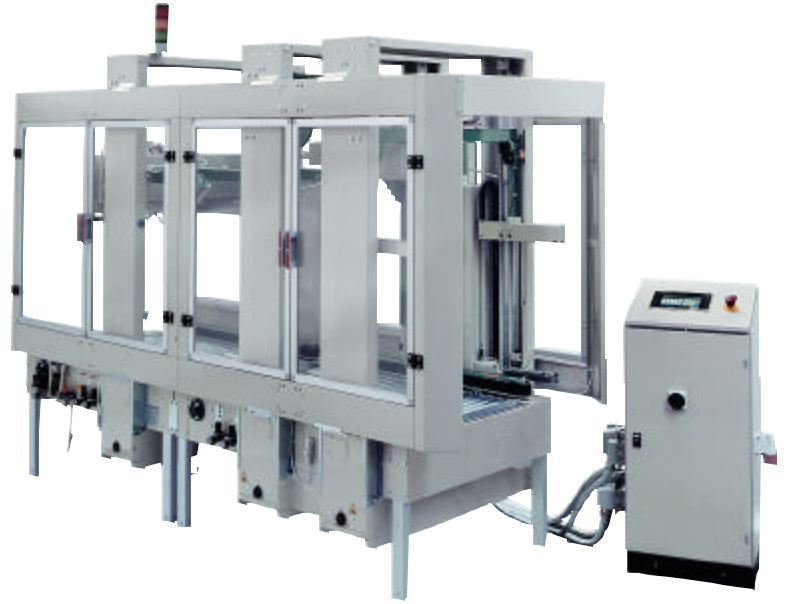

APPLICATION

The STA-XF62 HS is the complete solution for the automatic closing and sealing of random size boxes. It automatically adjusts the side belts and the taping head to the dimension of the box, and the top minors and the major flaps are closed automatically, therefore, no operator is required. Due to its pneumatic flap closer, the STA-XF62 HS is also able to close and tape boxes of light corrugated board. It is particularly useful in situations where multiple production lines lead to a single closing station. The high level of automation offered by the STA-XF62 HS cuts down on the labor required.

EXCLUSIVE STA TAPE HEAD

The patented STA taping head is uniquely engineered to maintain consistent pressure to the tape to ensure the most secure, reliable seal possible. Our new line of interchangeable pressure sensitive taping heads are offered in a variety of tab lengths and tape widths to fit your application.


For best results, rely on STA Proven Performance acrylic tapes, for use with high-throughput automatic sealing machines. Together, you have the most reliable single source tape sealing system.



STA-XF62 HS

S E R I E S

Fully Automatic Random,
Flap Closing and Taping
with Indexer

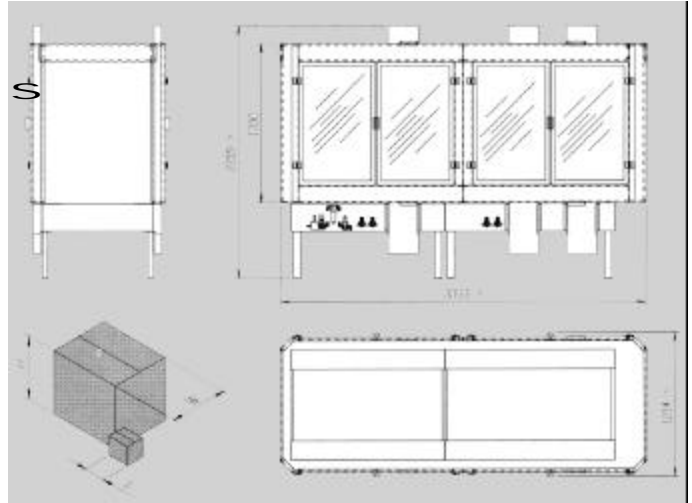

TAPE

- SUPREME
- SILENT SUPREME™
- EASY RELEASE™
- NATURAL RUBBER
- PRINTED
- COLORS
- RETAIL ROLL
- LABEL PROTECTION
- STATIONERY
- UPVC
- MASKING
- STRAPPING
- FILAMENT
- WATER ACTIVATED REINFORCED AND GUMMED PAPER

DISPENSERS

- HAND DISPENSERS
- NOISE REDUCING DISPENSERS
- BENCH DISPENSERS

MACHINES

- UNIFORM SEMI-AUTOMATIC CASE SEALERS
- UNIFORM AUTOMATIC CASE SEALERS
- RANDOM SEMI-AUTOMATIC CASE SEALERS
- RANDOM AUTOMATIC CASE SEALERS
- PACKING STATIONS
- CASE ERECTORS
- INTERCHANGEABLE TAPE HEADS

ACCESSORIES

- PACKING TABLES & STATIONS
- CASTERS
- THREE FLAPS CLOSERS
- BOX BLOCKING SYSTEM

SPECIFICATIONS

Model Number	Tape Width	Tab Length	Length Min.-Max.*	Width Min.-Max.*	Height Min.-Max.*
STAXF62HS	2"	2"	8.66" - 29.50"	4.72" - 24.00"	5.00" - 24.00"
STAXF62HS23	2"	3"	8.66" - 29.50"	4.72" - 24.00"	5.00" - 24.00"
STAXF62HS33	3"	3"	8.66" - 29.50"	5.00" - 24.00"	5.00" - 24.00"
STAXF62HS32	3"	2"	8.66" - 29.50"	5.00" - 24.00"	5.00" - 24.00"

*Recommended carton specifications may vary

Power Requirements:	110V / 60Hz / 6.2PH
Tape Width:	2-in. standard, 3-in. available
Maximum Case Weight:	100 lbs.
Throughput Rating:	12-15 cases
Air Requirements:	PSI: 80-100 lbs., CFM: 8+, dry air, 3/8" supply line
Machine Dimensions:	(LxWxH) 123" x 50" x 85"
Shipping Dimensions:	(LxWxH) Three pieces: 68" x 51" x 91"; 63" x 51" x 91"; 49" x 35" x 59"
Floor to Conveyor:	25-19/32"
Machine Weight:	Total weight of all three pieces: 1,770 lbs.
Shipping Weight:	Total weight of all three pieces: 2,100 lbs.

Authorized STA Packaging Tapes Distributor:

Specifications are subject to change without notice. Printed in the U.S.A. All trademarks and registered trademarks are property of Sekisui TA Industries, Inc.

SEKISUI TA INDUSTRIES, INC. • 100 SOUTH PUENTE STREET • BREA, CA 92821
(800) 258-8273 / (714) 255-7888 PHONE • (800) 235-8273 FAX • www.sta-tape.com